



Mirror remote expansion kit setup

1. Locate the box that is labeled "SW11630K".



SW11630K

2. You will find (1) USB-C to 3 USB-C cable, (1) remote pouch, and (3) additional Mirror remotes. Please note that the USB-C cable provided is only intended to charge the extra remotes.



3. Power on your Mirror device. The additional remotes can be paired one at a time and will only need to be paired once. Remove the primary remote docked in the back, and replace it with one of your new remotes.



4. Wait until the remote LED blinks orange followed by two quick grey pulses. Remove the remote and repeat step three for the remaining remotes. When all the remotes are paired, turn on all four remotes by holding the power button for 2 seconds.



Orange

5. When turned on, the remote's LED will remain solid (if any remote's LED is still blinking after its pairing process, please repeat the process outlined in step 3 until you achieve a solid LED). Four paired remotes should appear as so:



Grey

Blue

Yellow

Teal

6. To affix the remote pouch to the Mirror device, attach the velcro straps as shown here:



Need help?

Contact us at support@swivl.com or 1-888-837-6209. For more detailed information go to swivl.com/setup

by *Swivl*

7. To charge the additional remotes, turn them all off by holding the power button for 2 seconds. Plug in the one-sided USB-C cable into the USB-C port on the back of the Mirror.



8. Plug in the 3-sided USB-C cables into each remote's USB-C port.




9. While charging, each remote's LED will blink Orange.




Orange

10. To store the remotes in the Remote Pouch while they charge, wrap up the excess cords from each remote and put them back in the bag. Congratulations, your Remote expansion kit setup is complete.

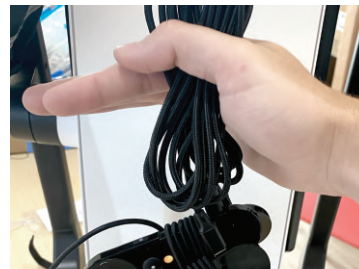


Updating your remote firmware


1. Occasionally, the remotes will require a firmware update. You will be shown a prompt to do so when your Mirror is turned on and connected to WiFi.

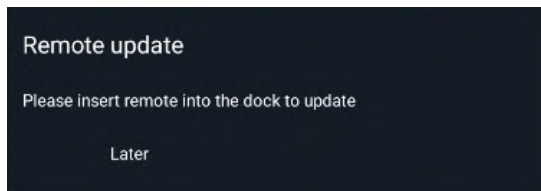


2. Insert any remote into the back dock to update. If a specific remote's firmware needs to be updated, the prompt on the screen will specify the remote by its LED.

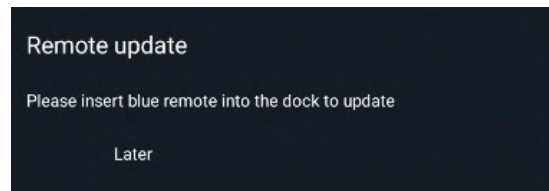

3. The firmware update should start updating automatically, but if not press the "Update" button on Mirror.

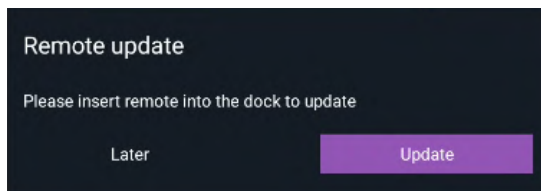

4. Do not remove the remote from the dock until you see a message on Mirror that the firmware update has been successful.

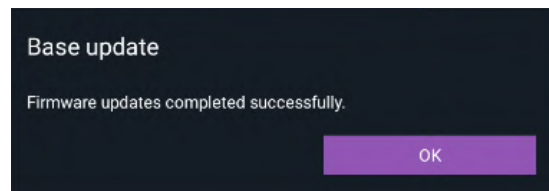

5. Please press the "OK" button on your Mirror to complete the remote firmware update process. Remove the remote from the dock and perform any additional firmware updates as needed.

Need help?

Contact us at support@swivl.com or 1-888-837-6209. For more detailed information go to swivl.com/setup

by *Swivl*